



ULTRA-GLO™ CERAMIC INFRARED FOODWARMERS

Models UGA-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 UGAH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72
 UGAL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 UGAHL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

Hatco Ultra-Glo Ceramic Foodwarmers ensure maximum flavor, safety and holding time without continuing to cook the food. The prefocused heat pattern provides an increased pyramidal dimension, enveloping the food holding area not just side-to-side, but front-to-back. Heat is concentrated at the edges where heat loss is the greatest.

FLEXIBILITY


The increased height of the ceramic heat source offers improved operational working clearances, giving the chef and server an improved ergonomic environment in which to work.

With a variety of widths and options, Ultra-Glo Ceramic Foodwarmers are adaptable to any location and configuration. Back or front-of-the-house use, open kitchen concepts or buffet lines, Ultra-Glo is available in continuous single or dual aluminum housings up to 6' (1829 mm), with or without lights. Angle brackets come standard, non-adjustable tubular stands are optional. Ultra-Glo models have a clear anodized finish and are available in optional Gloss Finishes or standard *Designer* colors.

QUALITY

The following features assure the finest performance for years to come:

- Available in widths from 18" to 72" (457-1829 mm).
- Sturdy extruded aluminum housings eliminate sagging.
- Prefocused heat maintains safe serving temperatures longer without continuing to cook the food.
- Variety of models, configurations and colors provide unlimited flexibility.
- Optional coated shatter-resistant incandescent lights enhance brilliant product display while safeguarding food from bulb breakage.

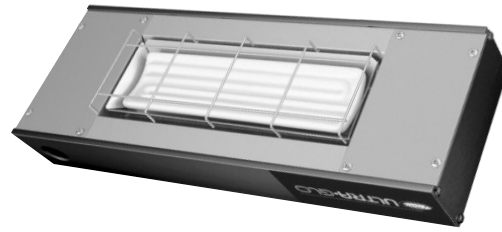

Model UGAH-18
with remote control box
(not shown) and optional
translucent gloss finish



Model UGAL-60




HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
 (800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976
www.hatcocorp.com • E-mail: equipsales@hatcocorp.com

CERAMIC HEATING ELEMENTS GUARANTEED AGAINST
 BURNOUT FOR ONE YEAR.



ULTRA-GLO™ CERAMIC INFRARED FOODWARMERS

Models UGA-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 UGAH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72
 UGAL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 UGAHL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

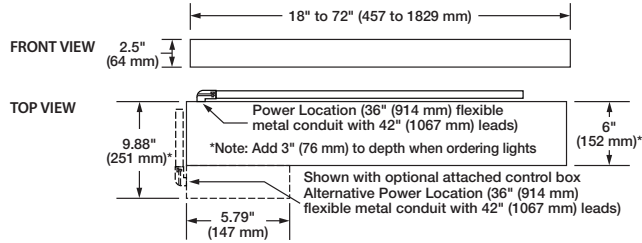

SPECIFICATIONS: Single Models - Aluminum

STANDARD WATT	WATTS	AMPS	HIGH WATT	WATTS	AMPS	WIDTH	SHIPPING WEIGHT*
UGA-18			UGAH-18			18" (457 mm)	9 lbs. (4 kg)
120V	500	4.2	120V	650	5.4		
208V	490	2.4	208V	675	3.2		
	500	2.1	240V	650	2.7		
UGA-24			UGAH-24			24" (610 mm)	10 lbs. (5 kg)
120V	650	5.4	120V	750	6.3		
208V	675	3.2	208V	750	3.6		
	650	2.7	240V	750	3.1		
UGA-30			UGAH-30			30" (762 mm)	11 lbs. (5 kg)
120V	900	7.5	120V	1125	9.4		
208V	840	4.0	208V	1125	5.4		
	900	3.8	240V	1125	4.7		
UGA-36			UGAH-36			36" (914 mm)	12 lbs. (5 kg)
120V	1000	8.3	120V	1300	10.8		
208V	980	4.7	208V	1350	6.5		
	1000	4.2	240V	1300	5.4		
UGA-42			UGAH-42			42" (1067 mm)	13 lbs. (6 kg)
120V	1200	10.0	120V	1500	12.5		
208V	1120	5.4	208V	1500	7.2		
	1200	5.0	240V	1500	6.3		
UGA-48			UGAH-48*			48" (1219 mm)	14 lbs. (6 kg)
120V	1500	12.5					
208V	1470	7.1	208V	2025	9.7		
	1500	6.3	240V	1950	8.1		
UGA-54*			UGAH-54*			54" (1372 mm)	16 lbs. (7 kg)
208V	1470	7.1	208V	2250	10.8		
240V	1500	6.3	240V	2250	9.4		
UGA-60*			UGAH-60*			60" (1524 mm)	17 lbs. (8 kg)
208V	1960	9.4	208V	2700	13.0		
240V	2000	8.3	240V	2600	10.8		
UGA-66*			UGAH-66*			66" (1676 mm)	19 lbs. (9 kg)
208V	1960	9.4	208V	2700	13.0		
240V	2000	8.3	240V	2600	10.8		
UGA-72*			UGAH-72*			72" (1829 mm)	20 lbs. (9 kg)
208V	1960	9.4	208V	3000	14.4		
240V	2000	8.3	240V	3000	12.5		

* Does not include RMB. Add 2-8 lbs. (1-3 kg) to shipping weight depending on size of RMB.

• Not available in 120 volt.

DIMENSIONS

Single Models with Remote Control Enclosure:

18"-72"W x 6"D▲ x 2.5"H (457-1829 x 152 x 64 mm).

Single Models with Attached Control Box:

18"-72"W x 9.88"D▲ x 2.5"H (457-1829 x 251 x 64 mm).

Remote Control Enclosure: 5.5", 9", 14", 16", or

20"W x 3"D x 2.5"H (140, 229, 356, 406, or 508 x 76 x 64 mm).

Attached Control Box: 5.79" (single).

▲ Add 3" (76 mm) to depth when ordering single model units with lights.

OPTIONS (NOT FOR RETROFIT)

- Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper
- Gloss Finishes: Gleaming Gold, Glossy Gray, Bold Black, Radiant Red, Brilliant Blue
- Non-standard colors are non-returnable
- Remote Control Enclosure

PRODUCT SPECS - Infrared Foodwarmer

The Infrared Foodwarmer shall be an Ultra-Glo™, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Foodwarmer shall be an Ultra-Glo Model ... , rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

SPECIFICATIONS: Single Models with Lights - Aluminum

STANDARD WATT	WATTS	AMPS	HIGH WATT	WATTS	AMPS	WIDTH	SHIPPING WEIGHT*
UGAL-18			UGAHL-18			18" (457 mm)	12 lbs. (5 kg)
120V	560	4.7	120V	710	5.9		
120/208V	550	2.9	120/208V	735	3.7		
120/240V	560	2.6	120/240V	710	3.2		
	560	2.3	240V	710	3.0		
UGAL-24			UGAHL-24			24" (610 mm)	13 lbs. (6 kg)
120V	770	6.4	120V	870	7.3		
120/208V	795	4.2	120/208V	870	4.6		
120/240V	770	3.7	120/240V	870	4.1		
	770	3.2	240V	870	3.6		
UGAL-30			UGAHL-30			30" (762 mm)	15 lbs. (7 kg)
120V	1020	8.5	120V	1245	10.4		
120/208V	960	5.0	120/208V	1245	6.4		
120/240V	1020	4.8	120/240V	1245	5.7		
	1020	4.3	240V	1245	5.2		
UGAL-36			UGAHL-36			36" (914 mm)	17 lbs. (8 kg)
120V	1180	9.8	120V	1480	12.3		
120/208V	1160	6.2	120/208V	1530	8.0		
120/240V	1180	5.7	120/240V	1480	6.9		
	1180	4.9	240V	1480	6.2		
UGAL-42			UGAHL-42			42" (1067 mm)	18 lbs. (8 kg)
120V	1380	11.5	120V	1680	14.0		
120/208V	1300	6.9	120/208V	1680	8.7		
120/240V	1380	6.5	120/240V	1680	7.5		
	1380	5.8	240V	1680	7.0		
UGAL-48			UGAHL-48*			48" (1219 mm)	20 lbs. (9 kg)
120V	1740	14.5					
120/208V	1710	9.1	120/208V	2265	11.7		
120/240V	1740	8.3	120/240V	2190	10.1		
	1740	7.3	240V	2190	9.1		
UGAL-54*			UGAHL-54*			54" (1372 mm)	22 lbs. (10 kg)
120/208V	1710	9.1	120/208V	2490	12.8		
120/240V	1740	8.3	120/240V	2490	11.4		
	1740	7.3	240V	2490	10.4		
UGAL-60*			UGAHL-60*			60" (1524 mm)	23 lbs. (10 kg)
120/208V	2260	11.9	120/208V	3000	15.5		
120/240V	2300	10.8	120/240V	2900	13.3		
	2300	9.6	240V	2900	12.1		
UGAL-66*			UGAHL-66*			66" (1676 mm)	25 lbs. (11 kg)
120/208V	2260	11.9	120/208V	3000	15.5		
120/240V	2300	10.8	120/240V	2900	13.3		
	2300	9.6	240V	2900	12.1		
UGAL-72*			UGAHL-72*			72" (1829 mm)	27 lbs. (12 kg)
120/208V	2320	12.4	120/240V	3360	15.5		
120/240V	2360	11.3	240V	3360	14.1		
			120/208V†	3000	14.4		
			circ 1 280V	360	3.0		

Shaded areas contain electrical information for **Export units only**.

† Unit with multiple circuit connections. Each circuit may require a separate circuit breaker.

VOLTAGE

120, 208 and 240 volts, single phase. Models with Lights: 120, 120/208 and 120/240 volts, single phase.

MOUNTING REQUIREMENTS

Ultra-Glo Warmers must be mounted at least 1" (25 mm) below shelf.

Ultra-Glo Single Standard Watt Warmers should be positioned 14" to 18" (356-457 mm) above a non-metallic surface.

Single High Watt Warmers should be positioned 16" to 22" (406-559 mm) above a non-metallic surface.

- Non-Adjustable Tubular Stands – 14"-24" (356-610 mm)
- Incandescent Lights
- Halogen Bulbs in lieu of Standard Display Lights
- Extended Electrical Leads
- Remote Control Enclosure with Toggle Switch, Electronic Infinite Control, Relay, and Indicator Light (in lieu of attached control box)

The Ultra-Glo shall consist of an aluminum housing, ceramic heating element, and angle brackets for mounting. Remote Control Enclosure is recommended. Mounting heights between 14" to 18" (356-457 mm) single standard (low) watt, 16" to 22" (406-559 mm) single high watt.

24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350
 Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com