



# GRILL EXPRESS™ TWO-SIDED GRILLS

**Model GX10IG, GX10IS, GX14IG, GX14IS, GX20IG, GX20IS & GX20IGS**

### Features/Benefits:

- ★ Star's line of Grill Express Two-Sided Grills provide commercial performance at an affordable price.
- ★ Heavy-duty cast iron platens, available in grooved or smooth, provide longevity and superior performance to meet your menu requirements.
- ★ Thermostat is rated from 175°F (79°C) to 450°F (232°C) and provides accurate sensing of temperature.
- ★ Embedded elements in cast iron platens provide superior heat distribution and fast recovery.
- ★ A reliable hinge system provides effortless operation and is designed for even pressure on both sides of product for consistent heat and searing of product.
- ★ Spacious grilling height accommodates products up to three inches, as well as thin products like tortillas and quesadillas.
- ★ The bottom platen has a patented 3/4" splash guard corralls product and offers maximum protection against grease spills.
- ★ Heavy gauge water resistant and flexible plastic conduit protects electrical connections.
- ★ Removable grease trough located in front of bottom platen allows easy clean up.
- ★ Large heat resistant handle for safe operation of the top platen.



**Model GX14IG**

### Application:

Star's Grill Express is designed for restaurants, snack bars, taverns, kiosk, convenience stores and other commercial operations with limited space. The Grill Express line is perfect for grilling tortillas, sandwiches, burritos, wraps, steaks, chicken, fish or any product you want grilled fast and easy.

### Quality Construction:

Star's Grill Express is constructed of 20 gauge stainless steel with grooved or smooth cast iron platens with embedded metal tubular elements. Reliable hinge design with extra large handle, adjustable legs and stainless steel grease tray. A water resistant 6' lead-in cord is furnished with a standard NEMA plug.

### Warranty:

Grill Express is covered by a one year parts and labor warranty.

Patent No. 6,257,126






Star Manufacturing International, Inc.

Grill Express™ Two-Sided Grill

## GRILL EXPRESS™ TWO-SIDED GRILLS

Model GX10IG, GX10IS, GX14IG, GX14IS, GX20IG, GX20IS & GX20IGS

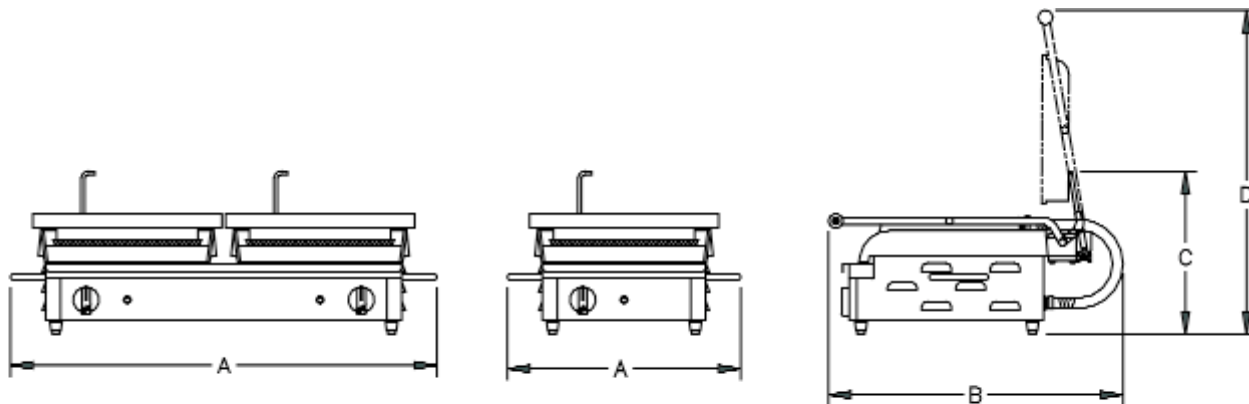

### Model and Specifications

| Model No. | Grid Surface       | (A) Width (cm)    | (B) Depth (cm)    | Height          |               | Voltage | Wattage     | Amps  | NEMA   | Approximate Weight |                |
|-----------|--------------------|-------------------|-------------------|-----------------|---------------|---------|-------------|-------|--------|--------------------|----------------|
|           |                    |                   |                   | (C) Closed (cm) | (D) Open (cm) |         |             |       |        | Shipping (kg)      | Installed (kg) |
| GX10IG    | Grooved            | 15-3/4"<br>(40)   | 19-7/8"<br>(50.5) | 10-7/8"         | 21-13/16"     | 120     | 1,400       | 11.7  | 5-15P  | 50 lbs.            | 45 lbs.        |
|           |                    |                   |                   | (27.6)          | (54.9)        | 230     | 1,650       | 7.2   | CEE7-7 | (22.7)             | (20.4)         |
| GX10IS    | Smooth             | 15-3/4"<br>(40)   | 19-7/8"<br>(50.5) | 10-7/8"         | 21-13/16"     | 120     | 1,400       | 11.7  | 5-15P  | 50 lbs.            | 45 lbs.        |
|           |                    |                   |                   | (27.6)          | (54.9)        | 230     | 1,650       | 7.2   | CEE7-7 | (22.7)             | (20.4)         |
| GX14IG    | Grooved            | 19-3/4"<br>(50.2) | 19-7/8"<br>(50.5) | 10-7/8"         | 21-13/16"     | 120     | 1,800       | 15    | 5-15P  | 65 lbs.            | 60 lbs.        |
|           |                    |                   |                   | (27.6)          | (54.9)        | 120     | 1,800       | 15    | 5-20P* | (29.5)             | (27.2)         |
|           |                    |                   |                   | 230             | 2,570         | 11.2    | CEE7-7      |       |        |                    |                |
| GX14IS    | Smooth             | 19-3/4"<br>(50.2) | 19-7/8"<br>(50.5) | 10-7/8"         | 21-13/16"     | 120     | 1,800       | 15    | 5-15P  | 65 lbs.            | 60 lbs.        |
|           |                    |                   |                   | (27.6)          | (54.9)        | 120     | 1,800       | 15    | 5-20P* | (29.5)             | (27.2)         |
|           |                    |                   |                   | 230             | 2,570         | 11.2    | CEE7-7      |       |        |                    |                |
| GX20IG    | Grooved            | 28-3/4"<br>(73)   | 19-7/8"<br>(50.5) | 12-7/8"         | 23-13/16"     | 208/240 | 2,700/3,600 | 13/15 | 6-20P  | 85 lbs.            | 80 lbs.        |
|           |                    |                   |                   | (32.7)          | (60.5)        | 230     | 3,300       | 14.4  | CEE7-7 | (38.6)             | (36.3)         |
| GX20IS    | Smooth             | 28-3/4"<br>(73)   | 19-7/8"<br>(50.5) | 12-7/8"         | 23-13/16"     | 208/240 | 2,700/3,600 | 13/15 | 6-20P  | 85 lbs.            | 80 lbs.        |
|           |                    |                   |                   | (32.7)          | (60.5)        | 230     | 3,300       | 14.4  | CEE7-7 | (38.6)             | (36.3)         |
| GX20IGS   | Grooved/<br>Smooth | 28-3/4"<br>(73)   | 19-7/8"<br>(50.5) | 12-7/8"         | 23-13/16"     | 208/240 | 2,700/3,600 | 13/15 | 6-20P  | 85 lbs.            | 80 lbs.        |
|           |                    |                   |                   | (32.7)          | (60.5)        | 230     | 3,300       | 14.4  | CEE7-7 | (38.6)             | (36.3)         |

\*Canadian Requirement

### Typical Specifications

Grills are constructed with 20 gauge stainless steel body and cast iron grooved or smooth platens. A spring hinge mechanism provides easy operation of top platen. Grilling up to 3" between platens with hinge system provides pressure to cook both sides of product. Embedded metal sheathed tubular elements are provided. Non-skid feet adjust up to one inch. Units are provided with pilot light, six foot power cord with NEMA rated plug (see specifications above). Unit carries approval of UL, UL Sanitation to NSF Standard 4 and UL Canada Standards. Printed in the U.S.A.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

Star Manufacturing International Inc. - 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800

Phone: (800) 264-7827 - FAX: (800) 264-6666 - www.star-mfg.com